

Optimal correction of independent and correlated errors

Sol H. Jacobsen* and Florian Mintert

Freiburg Institute for Advanced Studies, Albert-Ludwigs University of Freiburg, Albertstr. 19, 79104 Freiburg, Germany

(Dated: February 27, 2013)

We identify optimal quantum error correction codes for situations that do not admit perfect correction. We use entanglement decay as a signature of the correctability of errors, and as specific realisations we consider noisy channels with correlated errors on multiple qubits. We present n -qubit inequalities that govern the regimes in which different repetition codes are optimal and demonstrate significant improvement in performance.

PACS numbers: 03.67.Pp 03.67.Hk 02.30.Yy

I. INTRODUCTION

The goal of quantum error correction (QEC) is to transmit quantum information reliably despite noise and decoherence resulting from unavoidable environment coupling. On the one hand, QEC is essential for the practical implementation of quantum communication protocols and quantum computational algorithms, but, on the other hand, QEC also provides an interesting forum for examining the conditions in which generally irreversible open system dynamics can be undone.

Reversibility can only be achieved for specific decoherence models, and real open system dynamics will typically always deviate from such idealized scenarios. In practice one may achieve reversibility for the predominant decoherence effects, but typically not for the remaining subordinate processes. Consequently, if there is a clear separation in probability regimes for the various detrimental processes, *i.e.* errors that may occur, the best strategy is likely to target perfect correction of the more probable errors at the expense of leaving less likely errors uncorrected. This is the strategy currently employed by most QEC protocols. However, there is a plethora of common scenarios in which the simplification to separable probability regimes is insufficient, *e.g.* if, in addition to single qubit errors, there are correlated errors caused by fluctuations in global control fields, such as the laser that creates an optical lattice for neutral atoms [1] or a field gradient that induces an interaction between N ions [2]. Several important steps have already been taken in terms of quantifying the impact of correlated noise and calculating accuracy thresholds for concatenated codes and fault tolerant computation (see for example [3–6]), but the simplification remains a persistent problem. In the current paper we turn instead to the idea of *approximate* QEC: if a clear separation of probability regimes is not evident, it might instead be better to abandon the goal of perfect correction of the high-probability subset of errors [7]. In particular, we use entanglement dynamics to determine optimal QEC protocols for the cases where a typical separation of probability regimes with dominant

single qubit errors is not present.

Quantum dynamics can be described in terms of quantum channels Ω , *i.e.* completely positive maps

$$\varrho(t) = \Omega(\varrho(0)) = \sum_{i=1}^N E_i(t)\varrho(0)E_i^\dagger(t), \quad (1)$$

that connect a system's density matrix ϱ at an initial time $t = 0$ and a later time t . The specificities of the actual dynamics are characterized by the N time-dependent Kraus operators $E_i(t)$. If the Kraus operators satisfy the condition $\sum_{i=1}^N E_i^\dagger(t)E_i(t) = \mathbb{1}$, then the channel is trace preserving and thus deterministic. Conversely, if $\sum_{i=1}^N E_i^\dagger(t)E_i(t) < \mathbb{1}$ then the channel is probabilistic and there is a finite probability for a process that is not described by the channel to occur.

In the context of QEC, a deterministic channel is typically divided into a correctable and an uncorrectable part:

$$\Omega_t(\varrho) = \Omega_c(\varrho) + \Omega_u(\varrho), \quad (2)$$

such that $\Omega_c(\varrho)$ has an inverse channel for initial states in a well-defined subspace of the full system's Hilbert space. This subspace is called the code and Ω_c is correctable for initial states in the code. If the contributions from Ω_u vanish for $t = 0$ and result in deviation from trace conservation of the correctable channel Ω_c which grows slower than linearly with t , then arbitrarily good correction of Ω_t can be achieved [8].

The question of which states render a given channel correctable has a surprisingly simple answer, encapsulated by the necessary and sufficient conditions for the existence of a recovery operation [9, 10]. That is, if and only if there is a projector P , *i.e.* code, such that the Kraus operators describing the channel Ω satisfy the relation

$$PE_i^\dagger E_j P = \alpha_{ij} P, \quad (3)$$

then there is a deterministic quantum channel Ω^{-1} , such that $\Omega^{-1}(\Omega(\varrho)) = p\varrho$ with $p = \text{Tr}\Omega(\varrho)$ for all states that satisfy $P\varrho P = \varrho$, *i.e.* all states in the space defined by P . Here α is a Hermitian matrix with complex elements and the time dependence of the Kraus operators $\{E_i(t)\}$ is left implicit.

*sol.jacobsen@frias.uni-freiburg.de

In the standard implementation of QEC, the conditions (3) are satisfied for the Kraus operators of Ω_c only, while those of Ω_u reflect the finite (and presumed negligible) probability for an uncorrectable error. In the following we consider the scenario that this probability is not negligible, and examine the correctability of the full trace preserving channel. This more general case occurs when, for example, the probability for an error associated with the uncorrectable channel grows linearly or faster in t , or sufficiently fast repetition of Ω_c^{-1} is not possible.

The task at hand is thus the rigorous identification of optimal codes for conditions in which perfect correction of the errors is not possible. Such endeavours have been attempted previously, and it has been confirmed that the performance of quantum codes through the full noisy channel can be improved through the relaxation of the conditions (3) [7, 11, 12]. Approaches to this regime of approximate error correction typically require numerical optimisation over all possible encodings and recovery maps, which is extremely computationally demanding if not practically impossible unless one separates the two optimisations. The approaches typically use average or worst-case fidelity to identify codes with optimal performance. In what follows we shall instead target entanglement, since its decay is directly connected to reversibility, and therefore permits the assessment of code performance without the need to consider recovery operations [14–16].

The search for optimal codes thus begins not with the projector P , but a set of orthogonal states $|\Psi_i\rangle$ that span the code, *i.e.* $\sum_{i=1}^d |\Psi_i\rangle\langle\Psi_i| = P$, and by considering an entangled state

$$|\kappa\rangle = \sum_{i=1}^d \frac{1}{\sqrt{d}} (|\phi_i\rangle \otimes |\Psi_i\rangle) \quad (4)$$

between ancillary system with orthonormal states $|\phi_i\rangle$ and the system of interest. The system is affected by the noisy channel, but there is no dynamics in the ancillary system. In other words, Alice keeps the ancilla while sending the remaining entangled state through a noisy quantum channel to Bob.

If one has a perfect code, this implies that the state of the full composite system can be recovered after the effect of the noisy channel through a recovery operation that is acting on the system of interest only, but not on the ancillary system. In terms of entanglement theory, this means that the original state can be recovered through local operations only. Since the initial state and the final state (after the noise and recovery) have the same entanglement content (it is the same state), and since entanglement cannot increase through local operations, this implies that entanglement did not decrease through the effect of the noisy channel on the perfect code. For imperfect codes therefore, the loss of entanglement due to the noisy channel is a natural tool to characterise the correctability of a noisy channel, which can now be assessed without the need to consider the re-

covery operation explicitly. In what follows we present a method of targeting entanglement directly to identify optimal quantum codes, and demonstrate that such procedures provide substantial improvement in performance over current QEC implementations.

The rest of the paper is organised as follows: In section II we introduce the regime of approximate quantum error correction and additional nomenclature for examples provided in the text. We discuss the entanglement dynamics in II A and demonstrate explicit correlation between the rate of entanglement decay and the rate of deviation from complete error correction. We describe the code optimisation process in III, and give a simple 3-qubit example in III A where optimal codes are found to give substantial improvements. In III B we present the n -qubit case, with an explicit inequality distinguishing the two optimal regimes. We conclude in IV with some discussion and prospects for further work.

II. APPROXIMATE QUANTUM ERROR CORRECTION

We saw that the possibility of recovering the original message by employing a particular quantum code is encapsulated in criterion (3), and we introduced the scenarios in which no projectors can be found to satisfy those conditions. For such cases the deviation from the condition of perfect recoverability can be characterized by

$$\delta_c = \sum_{i,j} \text{Tr}(\Lambda_{ij} \Lambda_{ij}^\dagger), \quad \text{with} \quad (5)$$

$$\Lambda_{ij} = P E_i^\dagger E_j P - \alpha_{ij} P, \quad \text{and} \quad (6)$$

$$\alpha_{ij} = \frac{\text{Tr}(P E_i^\dagger E_j P)}{\text{Tr}(P)}. \quad (7)$$

Here the error set $\{E_i\}$ is now extended to include the operators of Ω_u , thus comprising the full trace-preserving channel. If it were possible to correct this extended set fully, then $\Lambda_{ij} \rightarrow 0$ and (6) would reduce to (3). Thus as an initial hypothesis the condition that δ_c be minimal for a good code seems plausible. This intuitive notion of deviation from (3) was also discussed in [13] and [11, 12], in which general and sufficient conditions for approximate operator QEC codes were given respectively, along with a suggested relationship between the deviation parameter Λ_{ij} and the optimal fidelity loss. In section II A we demonstrate direct correlation between the deviation and the rate of entanglement decay, giving a clear physical interpretation to the otherwise quite abstract Λ_{ij} .

For illustrative purposes we shall follow throughout the explicit example of a complete dephasing channel, through which one typically protects the message – a unit of information; a quantum bit – by encoding the message into a state with more qubits. The simplest examples of such encodings are the archetypal three-qubit repetition codes [10, 25] which, despite their simplicity, remain important test cases for the theoretical development and ex-

perimental implementation of quantum computing [18]. Error detection with such codes uses the majority-rule principle, which fails to produce the correct result if in fact two or more errors occurred. Essential to the correction procedure for repetition codes is thus the restrictive assumption that the channel imparts only single, uncorrelated errors on the coded states, an assumption that we remove in the following.

Upon transmission of the message, the noisy channel acts on the information according to equation (1). Errors on qubits are effected by the generators of $SU(2)$ (i.e. the Pauli matrices) supplemented with the identity operator, and result in bitflip or dephasing errors or a combination of the two. For pure dephasing our building blocks consist of the identity I and dephasing error σ_z :

$$I = \begin{pmatrix} 1 & 0 \\ 0 & 1 \end{pmatrix}, \quad \sigma_z = \begin{pmatrix} 1 & 0 \\ 0 & -1 \end{pmatrix}. \quad (8)$$

The code space is a tensor product of the individual qubit Hilbert spaces, and so the operation elements are constructed accordingly, with the full three-qubit dephasing channel given explicitly in Table I in the Appendix. We assume the probability for single and two-qubit errors are independent of the choice of qubits, and since the channel is trace preserving p_0, p_1, p_2 and p_3 respectively give the probabilities of errors occurring on zero, one, two or three qubits simultaneously. Note that to take account of all permutations, the full probability of a single error occurring on any one of the three qubits is thus $3p_1$ (or $3p_2$ for errors on two of the three qubits). The procedure for constructing the channel for other types and combinations of errors and codes follows intuitively.

A. Entanglement dynamics and relationship to approximate QEC

We demonstrate that the rate of entanglement decay implies that (5) is a signature of the reversibility of the errors effected by the channel by considering the entangled state (4). The message carried by the system is protected by extending the Hilbert space of $|\Psi_i\rangle$, and for three-qubit dephasing the standard code

$$P_3 = |+++\rangle\langle+++| + |--\rangle\langle--|, \quad (9)$$

with

$$|\pm\rangle = \frac{1}{\sqrt{2}}(|0\rangle \pm |1\rangle), \quad (10)$$

is one that completely corrects errors on single qubits. With this encoding, the entangled state $|\kappa\rangle$ becomes:

$$|\kappa_3\rangle = \frac{1}{\sqrt{2}}(|\phi_1, +++\rangle + |\phi_2, ---\rangle), \quad (11)$$

The corresponding density matrix is $\rho = |\psi\rangle\langle\psi|$, and the entanglement dynamics of ρ as the coded qubit is transmitted are calculated using the Lindblad master equation

(see for example [10]):

$$\frac{d\rho}{dt} = \sum_j \left[2L_j\rho L_j^\dagger - \{L_j^\dagger L_j, \rho\} \right]. \quad (12)$$

Here L_j are the Lindblad operators, which correspond to the types of error expected for the channel, and may be arbitrary errors in general. For pure dephasing errors as in Table I, the Lindblad operators take the associated form $L_1 = \sqrt{\gamma_1}\sigma_z \otimes I \otimes I$ etc, where γ_1 is the Lindblad rate for errors on single qubits, γ_2 the rate for errors on two qubits and so on. Explicit evaluation of (6) is possible after constructing the Kraus operators with expressions for the time-dependent probabilities in terms of the Lindblad rates (we give an example in the appendix). In turn, the entanglement dynamics can be represented using an appropriate measure and in our example we use Negativity [19]:

$$N(\rho) = \|\rho^{T_b}\| - 1 = \sum_i \|\lambda_i\| - \lambda_i. \quad (13)$$

Here $\|\dots\|$ denotes the trace norm and λ_i are the eigenvalues of ρ^{T_b} which denotes the partial transpose of ρ over subsystem b .

We confirm that investigating entanglement dynamics is a suitable method for assessing the correctability of errors via (5) when we examine the relationship between (5) and the decay of negativity of entangled states. At $t = 0$ we start with the maximally entangled state ρ , for which the reduced density matrix ρ_{red} for the code (obtained by tracing out the ancilla) is a projector. We thus explore the relationship between the dynamics that cause deterioration of the entanglement of ρ and the behaviour of (5) by replacing P in (6) with ρ_{red} such that

$$\rho_{red} E_i^\dagger E_j \rho_{red} = \alpha_{ij} \rho_{red} + \Lambda_{ij}. \quad (14)$$

The resulting general expression for Λ_{ij} is:

$$\Lambda_{ij} = \rho_{red} E_i^\dagger E_j \rho_{red} - \frac{\text{Tr}(\rho_{red} E_i^\dagger E_j \rho_{red})}{\text{Tr}(\rho_{red})} \rho_{red}. \quad (15)$$

By comparing the rate of deviation from (3) (as given by (5) using ρ_{red} in (15)), with the rate of entanglement decay for ρ , we find that the two are strongly correlated, as shown in Fig. 1 for the case of a full dephasing channel (Table I) with three-qubit codes and a particular choice of Lindblad rates ($\gamma_1 = \gamma_2 = 0.2\gamma_c$ and $\gamma_3 = \gamma_c$, where γ_c is the arbitrary characteristic rate (s^{-1})). The correlation is generated by sampling over different codes P'_n obtained by random unitary transformations of the original code:

$$P'_n = U P_n U^\dagger, \quad (16)$$

where the U are drawn from a circular unitary ensemble [21], and also produces the associated new input state

$$|\kappa'_n\rangle = I \otimes U |\kappa_n\rangle. \quad (17)$$

The strong correlation that is evident from this sampling thus confirms the hypothesis that δ_c be minimal for good codes, since an increase in the rate of change of (5) has an associated increase in the rate of entanglement decay.

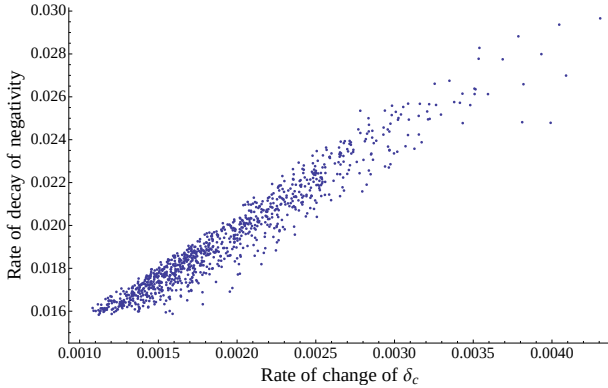


FIG. 1: Scatterplot for 3-qubit dephasing channel shows correlation between the rate of deviation from (3) as given by (5) using (15), versus rate of decay of entanglement of ρ . Each point on the plot represents the value of the initial rate of change of the function for a different random unitary transformation of the code [21]. (1000 points shown).

III. CODE OPTIMISATION

The direct correlation demonstrated in Section II A established that optimal entanglement preservation between the ancilla and the system corresponds to the minimum of (5), and is the best-case scenario for accurate transmission through the quantum channel. We turn now to the question of whether we can identify codes that produce such optimal behaviour and answer in the affirmative. We confirm optimality via numerical optimisation over an initial unitary transformation on the code as in (16), *i.e.* prior to the noisy channel, where the parameters are kept entirely general without imposing the requirement that the code should also completely correct single errors, potentially allowing for a tradeoff for better performance with the full channel. We begin by presenting the details for the explicit 3-qubit dephasing example, and then present the generalisation to the n -qubit inequalities of the model parameters that determine optimal code choice.

A. Optimal 3-qubit codes for known channels

Let us examine first the structure and behaviour of the standard single-qubit-correcting dephasing code (9). The decay behaviour is found by solving the Lindblad equation (12) with dephasing rates γ_1, γ_2 and γ_3 corresponding to single, double and triple errors respectively.

The explicit expressions for the probabilities corresponding to the three-qubit dephasing channel of Table I are given in (A-1), and are functions of the Lindblad rates. Any particular choice of rates $\gamma_1, \gamma_2, \gamma_3$ thus governs the probabilities and weighting of errors in the channel, and also governs the regimes in which different codes are optimal, as will be explained below.

While the dephasing code being considered is commonly referred to as the code to solve errors on single qubits, such a code also satisfies (3) when errors occur in other combinations from the full channel (e.g. errors occur on zero or two qubits only) since the code cannot distinguish between the pairs of Kraus operators that contribute to Λ_{ij} in (14). That is, one cannot distinguish between E_0 and E_7 , E_1 and E_6 , E_2 and E_5 , and E_3 and E_4 of Table I. The probabilities corresponding to these combinations result in $\delta_c = 2(\sqrt{p_0 p_3} + 3\sqrt{p_1 p_2})$. This is thus a target that must be beaten for any new code to improve on the results of the standard code.

An exhaustive search of the parameter space of the above model shows that choosing a code different from the standard (9) can improve performance whenever $\gamma_3 > \gamma_1, \gamma_2$, and that in fact in this regime the decay profile always converges to the performance exhibited by the code [29] $P'_3 = |0++\rangle\langle 0++| + |1--\rangle\langle 1--|$. Interestingly, qubit rotations such as this were also found to improve robustness for the noisy evolution of graph states in another context [20]. For this new optimal code, the Kraus combinations that contribute to violation of (3) for the full channel are the following elements in Λ_{ij} : $E_0^\dagger E_1$, $E_2^\dagger E_4$, $E_3^\dagger E_5$ and $E_6^\dagger E_7$. Since this means there are no violating pairs with probabilities $p_0 p_2$ or $p_0 p_3$, such a code satisfies (3) completely for zero or double, and separately zero and triple errors (e.g. if the channel contains no errors on single qubits).

By substituting the corresponding probabilities from Table I we find $\delta_c = 2(\sqrt{p_0 p_1} + 2\sqrt{p_1 p_2} + \sqrt{p_2 p_3})$ for the new code. By comparing expressions for the two codes we thus construct an inequality which dictates their regimes of optimality:

$$2(\sqrt{p_0 p_3} + 3\sqrt{p_1 p_2}) > 2(\sqrt{p_0 p_1} + 2\sqrt{p_1 p_2} + \sqrt{p_2 p_3}). \quad (18)$$

When the inequality is satisfied the code P'_3 can improve upon the original code. From this inequality it is again possible to confirm that rates $\gamma_3 > \gamma_1, \gamma_2$ yield improvement of the entanglement decay within the decay lifetime, and we provide an example plot of the improvement in Figure 2 with the choice of rates $\gamma_1 = \gamma_2 = 0.2\gamma_c$, $\gamma_3 = \gamma_c$ (for convenience an indication of the corresponding probability evolution is given in Table II in the appendix). This plot confirms both significant improvement in entanglement preservation and also demonstrates the optimality of the alternative code which converges on the optimised result. The inset is a plot of δ_c , defined in (5), showing that the steepness of the slope reduces for the optimal code, in accordance with the correlation with the rate of entanglement decay demonstrated in Figure 1.

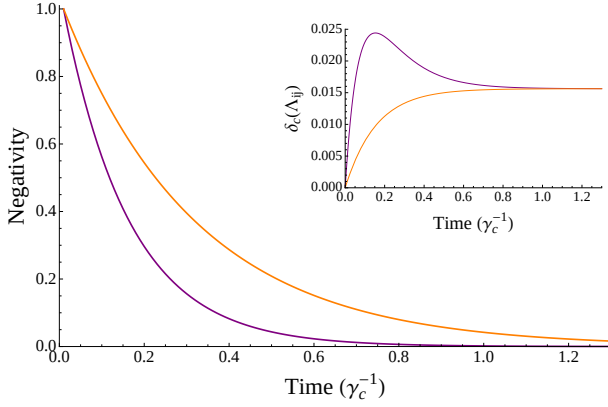


FIG. 2: Plot shows Negativity (13) versus time for a 3-qubit dephasing example with rates $\gamma_1 = \gamma_2 = 0.2\gamma_c$, $\gamma_3 = \gamma_c$. Entanglement decay for the original dephasing code $P = |++\rangle\langle++| + |--\rangle\langle--|$ shown in purple/below and the decay after optimisation over unitary transformation shown in orange/above, which is coincident with the decay for the code $P'_3 = |0++\rangle\langle0++| + |1--\rangle\langle1--|$. A significant improvement in entanglement preservation is evident. The inset shows the corresponding evolution of the violation of the complete error correction conditions (3) as given by function (5) using (15). Here the original code is in purple/above and the optimised evolution in orange/below.

Once optimal codes have been identified, the remaining step is to implement the appropriate syndrome measurement and recovery procedure. Consider for example the following set of operators:

$$\begin{aligned} A_0 &= I \otimes I \otimes I, \\ A_1 &= I \otimes \sigma_z \otimes I, \\ A_2 &= (\sqrt{2-3q_2-q_3})I \otimes I \otimes \sigma_z \\ &\quad - i(\sqrt{3q_2+q_3-1})\sigma_z \otimes I \otimes \sigma_z, \\ A_3 &= (\sqrt{1-q_3})I \otimes \sigma_z \otimes \sigma_z - i(\sqrt{q_3})\sigma_z \otimes \sigma_z \otimes \sigma_z, \end{aligned} \quad (19)$$

with

$$0 \leq q_2 \leq \frac{2}{3}, \quad \text{and} \quad 0 \leq q_3 \leq 1,$$

where the parameters q_2, q_3 indicate what proportion of such errors can be corrected completely. The effect of errors from this set can be completely undone with the use of the alternative code P'_3 , that is, the conditions (3) are satisfied, which permits the identification of the correct recovery procedure in the usual way [10]. Clearly the original code cannot satisfy (3) for this choice since it includes both two- and three-qubit errors along with the identity. We can see that if $q_3 = 1$, we can correct simultaneous three-qubit errors completely, while sacrificing correction on simultaneous errors on qubits two and three, with a similar relationship governing A_2 . For the choice of operators (19) it is possible to find the set of conditions on the choice of q_2 and q_3 that will always

ensure maximal recoverability of errors in the channel:

$$\begin{aligned} p_2 > p_3 &\Rightarrow q_2 = \frac{2}{3}, q_3 = 0 \\ p_2 < p_3 &\Rightarrow q_2 = \frac{1}{3}, q_3 = 1. \end{aligned}$$

The choice (19) is thus an example where errors on multiple qubits can be corrected completely by the alternative code and not the original.

The above method of identifying optimal codes also holds for the bitflip channel, which is unitarily equivalent to the dephasing channel. For bitflips the Lindblad equation (12) retains terms with the identity, which implies that the evolution of the Kraus operators will depend on all four Lindblad rates $\gamma_0, \gamma_1, \gamma_2$ and γ_3 . Similar improvement to the dephasing case can thus be found for bitflips, with the same relationship between the rates separating the two regimes of optimal performance: $\gamma_3 > \gamma_1, \gamma_2$, i.e. the division is independent of γ_0 , with the original code being $(|000\rangle\langle000| + |111\rangle\langle111|)$, and alternative optimal code $(|+00\rangle\langle+00| + |-11\rangle\langle-11|)$.

B. Optimal n -qubit codes for known channels

The generalisation to n -qubit repetition codes proceeds as above with appropriate extensions of the error channel and associated Lindblad rates. While in general it is desirable to keep the number of qubits to a minimum, analysis of n -qubit coded states gives further insight into the structures leading to optimality. Such higher-qubit systems are frequently needed in practice, and the analysis below shows that substantial improvement of the entanglement decay profile is also possible in these cases.

As in the 3-qubit case above, optimisation over the parameters of an initial unitary transformation of extended qubit systems reveals convergence to the same decay profile as given by two classes of optimal codes: the original repetition code

$$P_n = |+\rangle^{\otimes n}\langle+\rangle^{\otimes n} + |-\rangle^{\otimes n}\langle-\rangle^{\otimes n}, \quad (20)$$

and the new code

$$P'_n = |0, +\rangle^{\otimes n-1}\langle 0, +\rangle^{\otimes n-1} + |1, -\rangle^{\otimes n-1}\langle 1, -\rangle^{\otimes n-1}. \quad (21)$$

This latter notation indicates the coded state contains a single $|0\rangle$ in the logical code for $|+\rangle$, supplemented with $(n-1)$ qubits in $|+\rangle$, and the corresponding arrangement of a single $|1\rangle$ and $(n-1)$ qubits in $|-\rangle$ in the logical code for $|-\rangle$. When the probabilities of the different classes of errors (single, double etc.) are independent of the choice of qubits as is the case in our channels (e.g. Table I), it does not matter which qubit of the code contains the rotation.

Similarly to equation (18), we can derive an n -qubit inequality which separates the regimes in which the two n -qubit codes (20) and (21) produce optimal (slowest) rate of entanglement decay:

$$\sum_{i=0}^n \binom{n}{i} \sqrt{p_i p_{n-i}} > 2 \sum_{i=0}^{n-1} \binom{n-1}{i} \sqrt{p_i p_{i+1}}, \quad (22)$$

where $\binom{n}{i}$ are binomial coefficients. When the inequality is satisfied, the new code (21) improves upon the performance of (20).

The utility of the method is underlined by considering an $n = 4$ example in Fig. 3, in which we compare the 4-qubit code (20) correcting single qubit errors, the code $P_4'' = |+, -^{\otimes 3}\rangle\langle +, -^{\otimes 3}| + |+, ^{\otimes 3}, -\rangle\langle +, ^{\otimes 3}, -|$ which corrects errors on four qubits, and the code (21) with 4 qubits, which *also* corrects correlated errors on all four, but was found in the text to be optimal also for the intermediate range. We have chosen Lindblad rates $\gamma_1 = 0.2\gamma_c$, $\gamma_2 = 0.3\gamma_c$, $\gamma_3 = 0.1\gamma_c$, $\gamma_4 = 2\gamma_c$ (associated indicative probability evolution is given in Table III in the appendix), and it is evident that the new code (21) significantly outperforms both of the previous approaches.

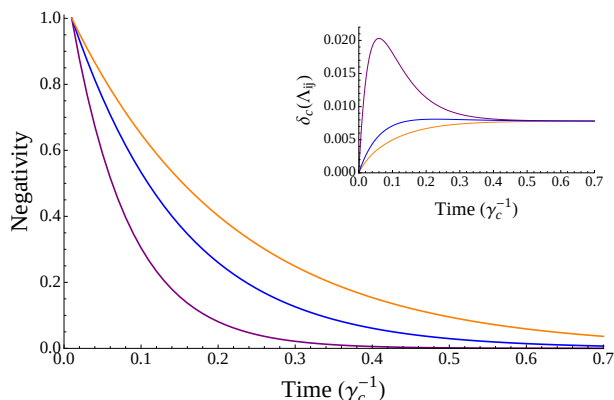


FIG. 3: Plot shows Negativity (13) versus time for a 4-qubit example with rates $\gamma_1 = 0.2\gamma_c$, $\gamma_2 = 0.3\gamma_c$, $\gamma_3 = 0.1\gamma_c$, $\gamma_4 = 2\gamma_c$. An indication of the evolution of the probabilities of the associated errors is given in Table III. Entanglement decay for initial codes $P_4 = |+\rangle^{\otimes 4}\langle +|^{\otimes 4}| + |-\rangle^{\otimes 4}\langle -|^{\otimes 4}|$ shown in purple/below, code $P_4'' = |+, -^{\otimes 3}\rangle\langle +, -^{\otimes 3}| + |+, ^{\otimes 3}, -\rangle\langle +, ^{\otimes 3}, -|$ in blue/middle, and code $P_4' = |0, +^{\otimes 3}\rangle\langle 0, +^{\otimes 3}| + |1, -^{\otimes 3}\rangle\langle 1, -^{\otimes 3}|$ in orange/above. A significant improvement in entanglement preservation is evident. The inset shows the corresponding evolution of the violation of the complete error correction conditions (3) as given by function (5) using (15) with purple as the top line, blue in the middle and orange below.

IV. OUTLOOK

The general optimisation problem of minimising Λ_{ij} in (6) sets the framework for finding the optimal quantum error correcting codes for protecting information where the quantum channel includes correlated errors on multiple qubits, a field still largely in its infancy. We have demonstrated here that one can target entanglement specifically in finding such optimal codes, with direct correlation between the rate of deviation from the conditions for complete correction and the rate of entanglement decay. Comparing the time-dependent entanglement decay

profiles of different codes thus enables performance evaluation of different codes and gives a clear indication of how correctable errors of a particular channel are, without the need to consider recovery procedures directly. Such tools are invaluable in determining the choice of code in practice, where every additional qubit required for quantum coding is a significant barrier to implementation.

We have presented the explicit details for optimal performance in cases where there is a single type of error, such as dephasing. The same approach, however, also applies directly to situations in which different types of errors affect the qubits. The presence of multiple types of errors (*i.e.* bitflip in addition to dephasing) typically requires additional overhead in the number of qubits that realise a code. Whereas the minimal number of qubits to define a code to protect against arbitrary single-qubit errors is 5 [22, 23], practical realizations often use even more qubits such as the 7-qubit Steane code [24] or the 9-qubit Shor code [25]. Since rates for bit-flips are typically substantially lower than those for dephasing, approximate error correction certainly defines pathways to work with fewer qubits than necessary for perfect correction while improving overall performance.

For general quantum information processing, it is essential to define tools that work for arbitrary states. In more specific applications such as quantum simulations [26–28], it might be desirable to stress the correctability of certain states more than others. Despite the tremendous usefulness of inequality (22), it has no generalization to cases where the projector P in (6) is replaced by a density matrix ρ with different weights for different components, which would permit preference to be given to certain states. In that case, optimization of reversibility via the violation of (3) is no longer possible, but defining an entangled state $|\kappa\rangle$ between code space and ancilla still enables the assessment of reversibility via entanglement decay.

Acknowledgements

The authors acknowledge funding from the European Research Council within grant number 259264, and wish to thank Joonwoo Bae and Federico Levi for fruitful discussions.

Appendix A: Supplementary information for dephasing examples

The operation elements of the full dephasing channel are given in Table I.

E_0	$\sqrt{p_0}I \otimes I \otimes I$
E_1	$\sqrt{p_1}\sigma_z \otimes I \otimes I$
E_2	$\sqrt{p_1}I \otimes \sigma_z \otimes I$
E_3	$\sqrt{p_1}I \otimes I \otimes \sigma_z$
E_4	$\sqrt{p_2}\sigma_z \otimes \sigma_z \otimes I$
E_5	$\sqrt{p_2}\sigma_z \otimes I \otimes \sigma_z$
E_6	$\sqrt{p_2}I \otimes \sigma_z \otimes \sigma_z$
E_7	$\sqrt{p_3}\sigma_z \otimes \sigma_z \otimes \sigma_z$

TABLE I: Table of error set for full dephasing channel for three-qubit codes.

$$\begin{aligned}
\sqrt{p_0} &= \frac{1}{2\sqrt{2}} \left(e^{-4(3\gamma_1+2\gamma_2+\gamma_3)t} \sqrt{3e^{8(2\gamma_1+\gamma_2+\gamma_3)t} + e^{8(3\gamma_1+2\gamma_2+\gamma_3)t} + 3e^{4(5\gamma_1+2\gamma_2+\gamma_3)t} + e^{4(3\gamma_1+4\gamma_2+\gamma_3)t}} \right), \\
\sqrt{p_1} &= \frac{1}{2\sqrt{2}} \left(\sqrt{1 - e^{-8(\gamma_1+\gamma_2)t} - e^{-4(3\gamma_1+\gamma_3)t} + e^{-4(\gamma_1+2\gamma_2+\gamma_3)t}} \right), \\
\sqrt{p_2} &= \frac{1}{2\sqrt{2}} \left(\sqrt{1 - e^{-8(\gamma_1+\gamma_2)t} + e^{-4(3\gamma_1+\gamma_3)t} - e^{-4(\gamma_1+2\gamma_2+\gamma_3)t}} \right), \\
\sqrt{p_3} &= \frac{1}{2\sqrt{2}} \left(\sqrt{1 + 3e^{-8(\gamma_1+\gamma_2)t} - e^{-4(3\gamma_1+\gamma_3)t} - 3e^{-4(\gamma_1+2\gamma_2+\gamma_3)t}} \right). \tag{A-1}
\end{aligned}$$

Indicative values of the probability evolution of (A-1) for a particular choice of Lindblad rates where improvements can be made to the standard dephasing code are given in Table II.

	$t=0$	$t=0.1$	$t=0.2$	$t=0.4$	$t=0.6$
p_0	1	0.66	0.46	0.28	0.19
$3p_1(\equiv 3p_2)$	0	0.10	0.18	0.27	0.32
p_3	0	0.13	0.18	0.19	0.17

TABLE II: Indicative approximate values of the probability evolution of (A-1) for a 3-qubit repetition code sent through a full dephasing channel (Table I) with rates $\gamma_1 = \gamma_2 = 0.2\gamma_c$, $\gamma_3 = \gamma_c$ as represented in Fig. 2. Here the probabilities of single, double and triple errors are approximately equal for short times, and single and double errors begin to dominate at long times although the contribution from p_3 remains significant.

Explicit expressions for the time-dependent probabilities of errors occurring in noisy channels can be found by equating the Lindblad form with the Bloch representation of ρ in the standard way (see e.g. [10]). For the full dephasing channel given in Table I, the explicit expressions for the probabilities in terms of the Lindblad rates are:

Indicative values of the probability evolution for $n=4$ with Lindblad rates $\gamma_1 = 0.2\gamma_c$, $\gamma_2 = 0.3\gamma_c$, $\gamma_3 = 0.1\gamma_c$, $\gamma_4 = 2\gamma_c$ are given in Table III.

	$t=0$	$t=0.05$	$t=0.1$	$t=0.2$	$t=0.3$	$t=0.4$
p_0	1	0.62	0.41	0.21	0.13	0.09
$4p_1$	0	0.06	0.11	0.16	0.19	0.21
$6p_2$	0	0.15	0.24	0.34	0.38	0.39
$4p_3$	0	0.04	0.09	0.15	0.19	0.21
p_4	0	0.12	0.16	0.14	0.11	0.09

TABLE III: Indicative approximate values of the probability evolution according to a 4-qubit example with rates $\gamma_1 = 0.2\gamma_c$, $\gamma_2 = 0.3\gamma_c$, $\gamma_3 = 0.1\gamma_c$, $\gamma_4 = 2\gamma_c$ corresponding to Fig. 3.

-
- | | |
|---|---|
| <p>[1] I. Bloch, J. Dalibard and W. Zwerger. <i>Rev. Mod. Phys.</i>, 80, 885 (2008).</p> <p>[2] F. Mintert and C. Wunderlich. <i>Phys. Rev. Lett.</i>, 87, 257904 (2001).</p> <p>[3] P. Aliferis, D. Gottesman and J. Preskill. <i>Quant. Inf. Comput.</i>, 6(2), 97, (2006).</p> <p>[4] B.M. Terhal and G. Burkard. <i>Phys. Rev. A</i>, 71, 012336 (2005).</p> <p>[5] R. Klesse and S. Frank. <i>Phys. Rev. Lett.</i>, 95, 230503 (2005).</p> <p>[6] D. Aharonov, A. Kitaev and J. Preskill. <i>Phys. Rev. Lett.</i>, 96, 050504 (2006).</p> <p>[7] D.W. Leung et al. <i>Phys. Rev. A</i>, 56(4), 2567 (1997).</p> | <p>[8] A.Y. Kitaev. in <i>Quantum Communication, Computing and Measurement</i>, O. Hirota et. al. Eds., Plenum, New York (1997); E. Knill, R. Laflamme and W.H. Zurek. <i>Science</i>, 279, 342 (1998); D. Aharonov and M. Ben-Or. <i>SIAM J. Comput.</i>, 38, 1207 (2008).</p> <p>[9] E. Knill and R. Laflamme. <i>Phys. Rev. A</i>, 55(2), 900 (1997).</p> <p>[10] M.A. Nielsen and I.L. Chuang. <i>Quantum Computation and Quantum Information</i>. Cambridge: Cambridge University Press, 2010.</p> <p>[11] H.K. Ng and P. Mandayam. <i>Phys. Rev. A</i>, 81, 062342 (2010).</p> <p>[12] P. Mandayam and H.K. Ng. <i>arXiv</i>, quant-ph/1202.5139 (Feb</p> |
|---|---|

- 2012).
- [13] C. Bény and O. Oreshkov. *Phys. Rev. Lett.*, **104**, 120501 (2010).
 - [14] R. Wickert, N.K. Bernardes and P. van Loock. *Phys. Rev. A*, **81**, 062344 (2010).
 - [15] M. Murao, M.B. Plenio and V. Vedral. *Phys. Rev. A*, **61**, 032311 (2000).
 - [16] I. Sainz and G. Björk. *Phys. Rev. A*, **77**, 052307 (2008).
 - [17] P.W. Schor. *Phys. Rev. A*, **52**, R2493 (1995).
 - [18] M.D. Reed et al. *Nature*, **482**, 382 (2012).
 - [19] G. Vidal and R.F. Werner. *Phys. Rev. A*, **65**, 032314 (2002).
 - [20] L. Aolita et. al. *Phys. Rev. A*, **82**, 032317 (2010).
 - [21] K. Zyczkowski and M. Kuś. *J. Phys A: Math. Gen.*, **27**, 4235 (1994).
 - [22] C.H. Bennett et. al. *Phys. Rev. A*, **54**, 3824 (1996).
 - [23] R. Laflamme et. al. *Phys. Rev. Lett.*, **77**, 198 (1996).
 - [24] A.M. Steane. *Phys. Rev. Lett.*, **77**, 793 (1996).
 - [25] P.W. Shor. *Phys. Rev. A*, **52**, 2493 (1995).
 - [26] I. Bloch, J. Dalibard and S. Nascimbène. *Nat. Phys.*, **8**, 267 (2012).
 - [27] R. Blatt and C.F. Roos. *Nat. Phys.*, **8**, 277 (2012).
 - [28] A. Aspuru-Guzik and P. Walther *Nat. Phys.*, **8**, 285 (2012).
 - [29] Note that the other two permutations of these codes also produce optimal behaviour: They contain different violating Kraus combinations but the same corresponding probability combinations. In all cases where $\gamma_3 < \gamma_1, \gamma_2$, no unitary transformation can improve upon the original single-qubit-correcting code, making this the optimum in that regime.